


ISO 9001:2000 Certified



Wireless Remote Controls

PowerTouch P1000 Series

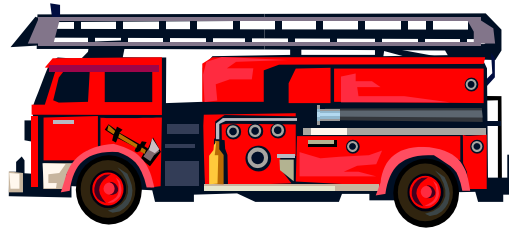

Sealed <<

300 Ft Range <<


Rolling Codes <<

Versatile <<

Economic <<

Mix N Match <<

Keeps its
Z i p
No Matter the
T r i p

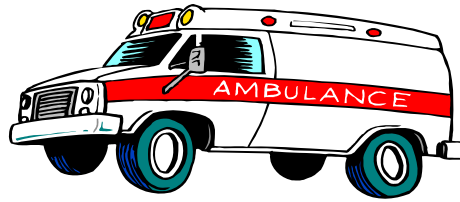

- » 2, 4 and 6 button transmitters can be matched with all receiver styles
- » All receivers will accept switched inputs
- » Customize the receiver to fit your application



Call TouchTronics, Inc., Sales for
Additional Information, Samples and Pricing
1-800-294-2570 (Inside US)
1-574-294-2570 (Outside US)

Designed & Manufactured in the **USA** since 1984



P1000 Series
Standard Unsealed
6 1/2" x 5 1/2"



P1200 Series
Standard Seal - Dust, Moisture
Super Seal - Hi Pressure Wash
9 1/4" x 5 1/4"



P1500 Series
Standard Unsealed
5 1/4" x 3"

System Specifications

- P1000/P1200 Receivers**
- Range - 300 Feet Typical
- Up to 600 Feet
 - Output - 4 Relays
Optional - 7 Relays
 - Input - 2 (+12v) A1 & A2
Optional - 6 (+12v or Ground) B1 - B6
 - Frequency - 433MHz
 - Codes - Rolling Codes
- Secure Encryption
 - Voltage - 12VDC
- 24VDC
 - Current - 5 Amps Max per Output
- 10 Amp Input
- 30 Amp Input
 - Harness - 9" Standard, 14 pin

System Specifications

- P1500 Receiver**
- Range - 300 Feet Typical
- Up to 600 Feet
 - Output - 1, 2 & 4 Relays
 - Input - 2 (+12v)
 - Frequency - 433MHz
 - Codes - Rolling Codes
- Secure Encryption
 - Voltage - 12VDC
- 24VDC
 - Current - 5 Amps Max per Output
- 10 Amp Input
 - Harness - 9" Standard, 8 pin



- Battery** - All Transmitter Styles
- Coin Style, Lithium, CR2032
- 100,000 1-second pulses
- 10 year shelf life

*S denotes On/Off Switch

Standard Antenna Options



Optional Antennas for Increased Range



Designed & Manufactured By:

TouchTronics, Inc.

57315 Nagy Drive
Elkhart, IN 46517

Ph: 1-800-294-2570
Fx: 1-574-293-1611

touchtronics@touchtronics.com
www.touchtronics.com

Available Co-axial Cable:
2, 5, 14 & 29 Foot Lengths