

Keyless RF Standard Receiver

RF - Radio Frequency

P1000 RF Receiver Specifications

- Range
 - 300 Feet Typical
 - Up to 600 Feet
- Output
 - 4 Relays
 - Optional
 - 7 Relays
 - 4 Relays - RR@G
- Input
 - 2 (+12v) A1 & A2
 - Optional
 - 6 (+12v or Ground) B1 - B6
- Frequency - 433MHz
- Codes
 - Rolling Codes
 - Secure Encryption
 - Self Learning Code Enrollment
- Voltage
 - 12VDC
 - 24VDC
- Current
 - 5 Amps Max per Output
 - 10 Amp Input
 - 30 Amp Input
- Harness - 9" Standard, 14 pin



P1000 Series
Standard Enclosure
6 1/2" x 5 1/2"

Transmitter Options



TK Series Sealed Transmitters
Available in 1, 2 & 4 Button Versions




TF Series Sealed Transmitters
Available in 2, 4 & 6 Button Versions



TM Series Standard Transmitters
Available in 1, 2 & 4 Button Versions



TX Series Standard Transmitters
Available in 2, 4 & 6 Button Versions

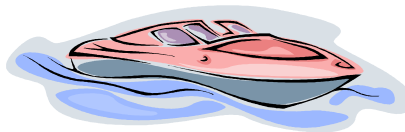

Call TouchTronics, Inc., Sales for
Additional Information, Samples and Pricing
1-800-294-2570 (Inside US)
1-574-294-2570 (Outside US)

Designed & Manufactured in the **USA** since 1984