


PowerTouch P1000 Series

Wireless Remote Controls

- Sealed
- 500 Ft Range
- Rolling Codes
- Versatile
- Economic
- Mix N Match

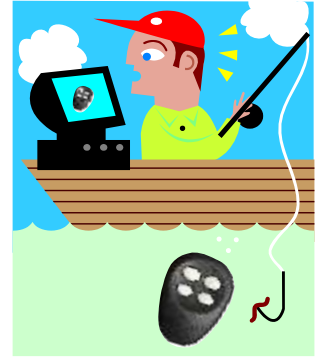

P1000 Series
Standard Unsealed
6 1/2" x 5 1/2"



P1200 Series
Standard Seal - Dust, Moisture
Super Seal - Hi Pressure Wash
9 1/4" x 5 1/4"



P1500 Series
Standard Unsealed
5 1/4" x 3"

System Specifications		System Specifications	
<p>P1000/P1200 Receivers</p> <p>Range - 300 Feet Typical - Up to 600 Feet</p> <p>Output - 4 Relays Optional - 7 Relays</p> <p>Input - 2 (+12v) A1 & A2 Optional - 6 (+12v or Ground) B1 - B6</p> <p>Frequency - 433MHz</p> <p>Codes - Rolling Codes - Secure Encryption</p> <p>Voltage - 12VDC - 24VDC</p> <p>Current - 5 Amps Max per Output - 10 Amp Input - 30 Amp Input</p> <p>Harness - 9" Standard, 14 pin</p>		<p>P1500 Receiver</p> <p>Range - 300 Feet Typical - Up to 600 Feet</p> <p>Output - 1, 2 & 4 Relays</p> <p>Input - 2 (+12v)</p> <p>Frequency - 433MHz</p> <p>Codes - Rolling Codes - Secure Encryption</p> <p>Voltage - 12VDC - 24VDC</p> <p>Current - 5 Amps Max per Output - 10 Amp Input</p> <p>Harness - 9" Standard, 8 pin</p>	
<p>TK & TF Series Sealed Transmitters</p> <p>P1000-TK1 P1000-TK2 P1000-TK4</p> <p>P1000-TF2 P1000-TF2-LK P1000-TF4 P1000-TF6</p>		<p>TM & TX Series Un-Sealed Transmitters</p> <p>P1000-TM1 P1000-TM2 P1000-TM4</p> <p>P1000-TX2 P1000-TX4 P1000-TX6</p> <p>P1000-TX2S* P1000-TX4S* P1000-TX6S*</p>	
<p>Battery - All Transmitter Styles - Coin Style, Lithium, CR2032 - 100,000 1-second pulses - 10 year shelf life</p>			

*S denotes On/Off Switch

Call TouchTronics, Inc., Sales for
Additional Information, Samples and Pricing
1-800-294-2570 (Inside US)
1-574-294-2570 (Outside US)

Designed & Manufactured in the **USA** since 1984