

Keyless RF Sealed Receiver

RF - Radio Frequency

P1200 RF Receiver Specifications

- | | |
|-----------|---|
| Range | - 300 Feet Typical
- Up to 600 Feet |
| Output | - 4 Relays |
| Optional | - 7 Relays
- 4 Relays - RR@G |
| Input | - 2 (+12v) A1 & A2 |
| Optional | - 6 (+12v or Ground) B1 - B6 |
| Frequency | - 433MHz |
| Codes | - Rolling Codes
- Secure Encryption |
| Voltage | - Self Learning Code Enrollment |
| | - 12VDC |
| Current | - 24VDC |
| | - 5 Amps Max per Output
- 10 Amp Input |
| Harness | - 30 Amp Input |
| Output | - 9" Standard, 14 pin |



P1200 Series
Standard Seal - Dust, Moisture
Super Seal - Hi Pressure Wash
9 1/4" x 5 1/4"

Transmitter Options



TK Series Sealed Transmitters
Available in 1, 2 & 4 Button Versions




TF Series Sealed Transmitters
Available in 2, 4 & 6 Button Versions



TM Series Standard Transmitters
Available in 1, 2 & 4 Button Versions



TX Series Standard Transmitters
Available in 2, 4 & 6 Button Versions

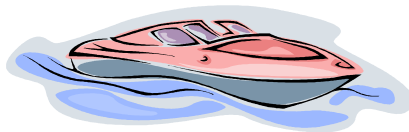

Call TouchTronics, Inc., Sales for
Additional Information, Samples and Pricing
1-800-294-2570 (Inside US)
1-574-294-2570 (Outside US)



Designed & Manufactured in the **USA** since 1984