

Keyless RF Standard Receiver

RF - Radio Frequency

P1500 RF Receiver Specifications

- Range - 300 Feet Typical
- Up to 600 Feet
- Output - 1, 2 & 4 Relays
- Input - 2 (+12v)
- Frequency - 433MHz
- Codes - Rolling Codes
- Secure Encryption
- Self Learning Code Enrollment
- Voltage - 12VDC
- 24VDC
- Current - 5 Amps Max per Output
- 10 Amp Input
- Harness - 9" Standard, 8 pin
- Output - All +12v @ 5 Amps Ea
- All Ground @ 500 mAmps Ea



P1500 Series
Standard Unsealed
5 1/4" x 3"

Transmitter Options



TK Series Sealed Transmitters
Available in 1, 2 & 4 Button Versions




TF Series Sealed Transmitters
Available in 1 - 4 Button Versions



TM Series Standard Transmitters
Available in 1, 2 & 4 Button Versions



TX Series Standard Transmitters
Available in 1 - 4 Button Versions

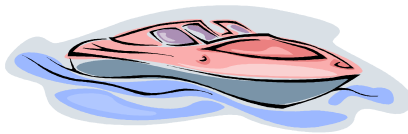

Call TouchTronics, Inc., Sales for
Additional Information, Samples and Pricing
1-800-294-2570 (Inside US)
1-574-294-2570 (Outside US)

Designed & Manufactured in the **USA** since 1984