


Keyless Start

RFID - Radio Frequency Identification

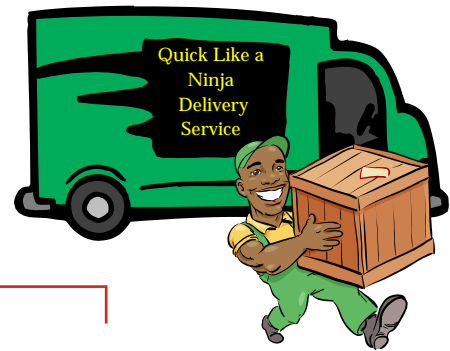


M130 Keyless Start Specifications

Range	- 6 - 8 Inches
Frequency	- 134KHz
Size	- 8.0" x 2 1/4" x 2 1/4"
Outputs / 5Amp	- Run, Start, Accessory, Siren, Dome Lt
Inputs	- Dome Lt, Data, 3 other Options
Voltage	- 12 VDC
Circuit Protection	- Solid State, Over Voltage & Temperature
Sealed	- Dust & Moisture
Output Endurance	- 500,000 Cycles
Diagnostics	- Module & System Level
Current Draw	- 3 @ 5 Amps, 1 @ 10 Amps

Secure Keyless Start RFID Technology

This unit is designed to be installed as a single or "stand-alone" unit.

1. Requires Driver Authorization to start truck.
2. Push-button start and stop truck.
3. Operates dome or courtesy light.
Turns off automatically in 45-minutes.
4. Solid state circuit protection for over-voltage
And over-current.
5. Electronic Master Fleet keys.
6. Sealed
7. Security if mated with M100 Antenna/Reader
8. Data bus connection between all unit

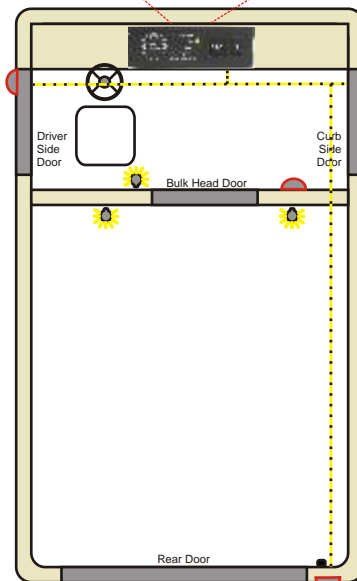

Driver
Wristband Key
M120-01



Fleet
Master Card Key
M121-01

Suggested Installation Locations

Call **TouchTronics, Inc.**, Sales for
Additional Information, Samples and Pricing
1-800-294-2570 (Inside US)
1-574-294-2570 (Outside US)

Designed & Manufactured in the **USA** since 1984